



[+ View More](#)

PRODUCT NUMBER: 2090221

## ELECTROSOFT CLASS 2

Handling of high voltage to 17 000 volts. Must be used with a leather overglove.

Overview

**Reference Number**

2090221

**Product Type**

Gloves

**Range**

Electrical Protection

**Line**

Latex

**Brand**

Sperian

**Brand formerly known as**

ELECTROSOFT

**Industry**

• Energy or Electricity • Maintenance • Telecoms

**Product Use**

Handling of high voltage to 17 000 volts. Must be used with a leather overglove.

Features & Benefits

**Feature**

Beige natural latex insulating glove  
Cut edge  
Category RC

**Benefit**

**COMFORT**  
Its ergonomic design combined with a lightly powdered interior increases the comfort by providing additional softness and allows the glove to be put on and taken off very easily.

**RESISTANCE**  
The natural latex base offers high dielectric characteristics.  
Its thickness (2.3mm) provides good dexterity while offering protection up to 17,000 volts.

**SAFETY**  
It must be used with leather over glove to protect against mechanical protection (abrasion, cut, tear and perforation).  
His length protects a large part of the forearm.

Technical Description

**Description**

CE CATEGORY : III Irreversible risks  
In accordance with standards :  
EN 60903-2003  
CEI 903-2002

**CHARACTERISTICS :**  
Beige natural latex insulating glove  
Cut edge  
Category RC

**Product Technology**

Dipped Gloves

**Glove/liner color**

Beige

**Coating Type**

Latex

**Length**

41 cm

**Thickness**

2.3 mm

**Harmlessness**

In conformity with the European standards

**Dexterity**

Class 2



**Sizes**

8 to 11

## Packaging Label

**Tagging**

CE SPERIAN  
2090221 XX  
EN 60903-2003  
CEI 903-2002

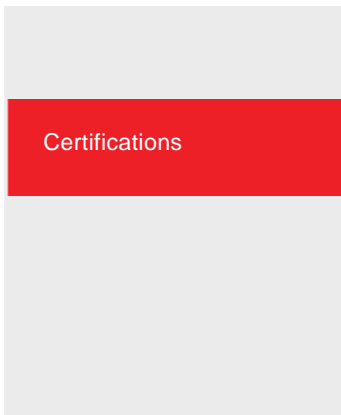

Certifications

**EC Category PPE**

3

**Quality Assurance**


ISO 9001 / 2000

**EC Attestation**

 EC Attestation


**EC Attestation Number**

0077/016/078/11/93/0002 - EXT 03/09/06



Photos & Images

We're sorry, there are no images available at this time.



Additional Information

**User Information Sheet**

106



**Storage Information**

Gloves that are used frequently should be tested at intervals less than 6 month.

Maintenance

Gloves that are used only occasionally should be tested after each use and, in any case, at intervals of not more than 12 months.

Gloves held in stock should be retested at intervals not exceeding 12 months.

Store in original packaging (Opaque and anti-UV packaging used for protection and instructions for use). Do not compact or fold.

Do not expose to heat sources (sunlight, radiators, artificial light). Store between 10°C and 21°C.

**Inspection** : Before each use, carry out a visual inspection and check the glove inflation. Any puncture or perforation makes the gloves unusable.

**Precautions** : Do not expose to solvents or chemicals that may cause deterioration. Do not use the glove when damp.

**Cleaning** : use water and soap. Dry below 65°C with ambient humidity.

**Care Instructions**

This article can be washed with soap and water at a temperature not exceeding 65°C.

The gloves must be dried thoroughly at a temperature not exceeding 65°C.